

## P16 Outdoor Messaging Board

### Technical Specification :-

Pixel Pitch (mm)	16mm
Type of LED	3mm Oval LED
Pixel Composition	2R(Single Red),2A(Single Amber) or 2R1G(Tricolour)
Module Size (mm)	1024mm x 384mm
Density	3906pcs/meter square
Viewing Angle	110° horizontal,50° vertical
Colour Available	Single Red, Tricolour (Red, Green and Amber) and Single Amber & Tricolour 256 Gray scale
Brightness	Single Red/Amber->2300cd/Sqm, Tricolour ->5000cd/Sqm
Control Mode	A synchronization with PC
Power Supply	220V/50HZ
Average Power Consumption	Single Red - 245W/Sqm, Tricolor-286W/Sqm
Max. Power Consumption	Single Red - 475W/Sqm, Tricolor-715W/Sqm
Supported Communication Tyres	a) Direct PC Via RS 232 and RS 485 b) Wireless Connection: Wifi Network, Phone Modern and GPRS
Data Cable / Power Cable	3 Meters Data Cable and 3 Meter Power Cable Included.




P16 Tricolor LED Panel




P16 Tricolor Messaging Board

### Standard Size for P16 Outdoor LED Messaging Board\*

Model	Resolution (Row*Column)	Overall Dimension (HxLxD) mm	Max. No of Line/No of Letters	Color Available
VMS-P16(OD)-128*24	24*128	384*2048*155	2 Lines, 20 Letters	Single Red, Tricolor
VMS-P16(OD)-192*24	24*192	384*3072*155	2 Lines, 30 Letters	and Tricolour 256
VMS-P16(OD)-192*48	48*192	768*3072*155	4 Lines, 30 Letters	Gray scale

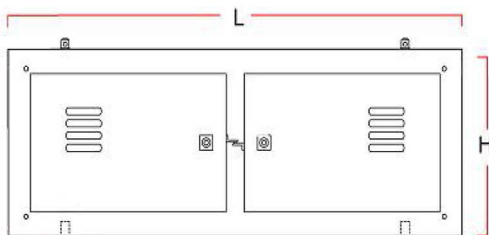

REAR VIEW



TOP VIEW

\* The above model are the most popular. Other sizes are also available

\*\*Other Color Available:Blue,Blue,Green,White and 7 Color