


P10 Window LED Messaging Board

Technical Specification :-

Pixel Pitch (mm)	10mm
Type of LED	3mm Oval LED
Pixel Composition	1R(Single Red),1A(Single Amber) or 1R1G(Tricolour)
Module Size (mm)	320mm x 160mm
Density	3906pcs/meter square
Viewing Angle	110° horizontal,50° vertical
Colour Available	Single Red, Tricolour (Red, Green and Amber) and Single Amber & Tricolour 256 Gray scale
Brightness	Single Red/Amber->5000cd/Sqm, Tricolour ->8000cd/Sqm
Control Mode	A synchronization with PC
Power Supply	220V/50HZ
Average Power Consumption	Single Red - 245W/Sqm, Tricolor-557W/Sqm
Max. Power Consumption	Single Red - 612W/Sqm, Tricolor-1392W/Sqm
Supported Communication Tyres	a) Direct PC Via RS 232 and RS 485 b) Wireless Connection: Wifi Network, Phone Modern and GPRS
Data Cable / Power Cable	3 Meters Data Cable and 3 Meter Power Cable Included.

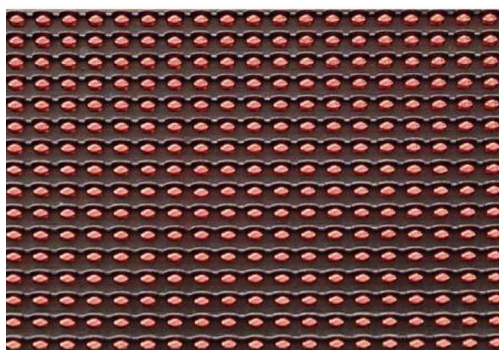


P10 Single Red LED Panel



P10 Semi-Outdoor Messaging Board (Red)

Standard Size for P10 Outdoor LED Messaging Board*

Model	Resolution (Row*Column)	Overall Dimension (HxLxD) mm	Max. No of Line/No of Letters	Color Available
VMS-P10(SM)-128*16	16*128	230*1320*90	2 Lines, 20 Letters	Single Red, Tricolor and Tricolour 256 Gray scale
VMS-P10(SM)-128*32	32*128	390*1350*90	4 Lines, 20 Letters	
VMS-P10(SM)-192*32	32*192	390*1990*90	4 Lines, 30 Letters	
VMS-P10(SM)-288*16	16*288	230*2950*90	2 Lines, 45 Letters	

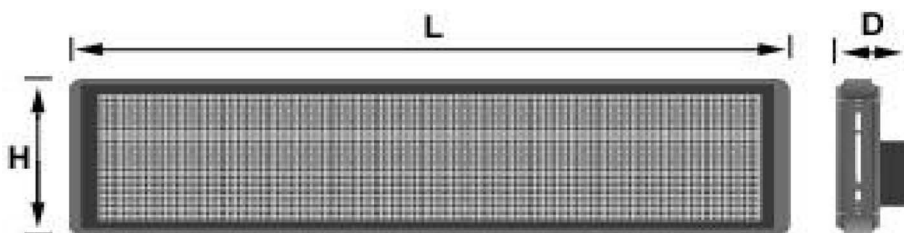

* The above model are the most popular. Other sizes are also available

** Other Color Available: Blue, Blue, Green, White and 7 Color